


1645 A

Receiver/Display Unit

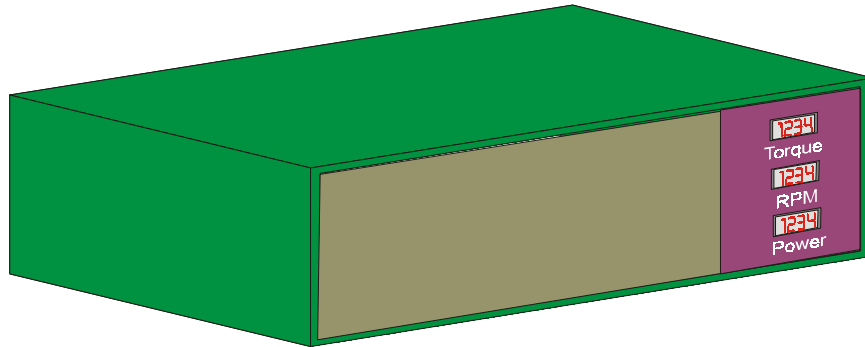

READOUT UNIT DISPLAYS (2)	$\pm 3 \frac{1}{2}$ digits
OPERATING TEMP. RANGE	+10°C to 50°C
OUTPUT AND INPUT CONNECTIONS	Screw terminals
ENCLOSURE--TYPE	19 inch rack mount
ACCURACY	
TORQUE	$\pm .75\%$ of full scale
RPM	$\pm .25\%$ of full scale
POWER	$\pm 1\%$ of full scale
FREQUENCY RESPONSE	DC to 100 Hz (3-dB limit)
ANALOG RECORDER OUTPUTS	
TORQUE	$\pm 10V$ scaled (+100% overrange)
RPM	0 -10V scaled (+10% overrange)
POWER	0-10V scaled (+10% overrange)
RECORDER OUTPUT IMPEDANCE	<1.0 Ohm resistive nominal
POWER REQUIREMENTS	115/230 VAC (-15% to +10%), selectable
POWER CONSUMPTION	50 to 400 Hz 100 VA max